




SIDE ELEVATION



FRONT ELEVATION



REAR ELEVATION

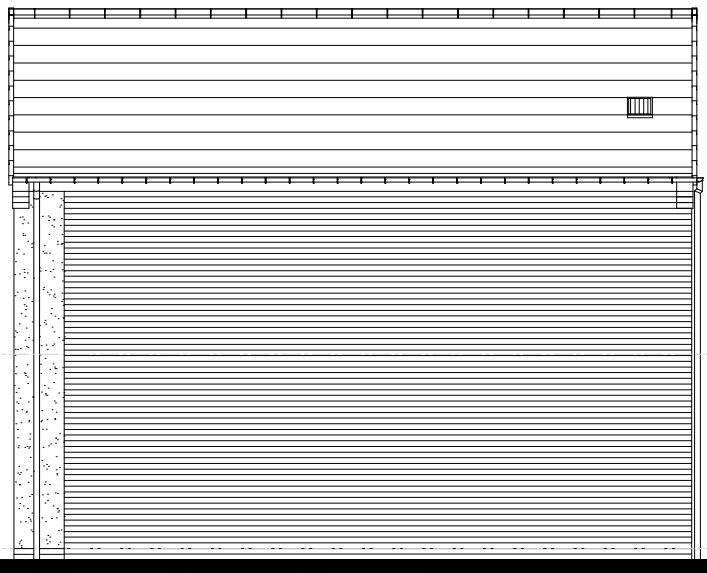

Elevation when detached

SIDE ELEVATION

- FEATURES
- * Flat profile roof tiles.
 - * Dry verge detail.
 - * UPVC fascia at eaves, with brick corbel to gable in same brick as main elevation
 - * Render to primary elevations.
 - * Plain side hung casement windows.
 - * Brick soldier course heads.
 - * Brick soldier course cills.
 - * Six panel main entrance door, with lean to canopy over on "gallows brackets"
 - * Nine panel garage door
 - * Dark brick below DPC.

- RENDER
- Where render is used 2 No. courses of bed joint reinforcement above and below opening at 225mm vertical centres extending 600mm either side of openings required
 - Movement joints at max 6m centres refer to GF working plan for details of any additional movement joints required.

- CONCRETE BRICKS
- Where concrete bricks are used in lieu of standard clay bricks, bed joint reinforcement must be installed in the outer leaf, two courses above and below any opening, extending 600mm beyond either side of the opening.
 - Refer to GF working plan for details of any additional movement joints required.
 - Working examples from the S.E. are available from Group Technical if more detail is required (Document Ref: STRUCT-010)

C02	Extract vents added	30.07.22
C01	Issued for Construction	01.11.21
Rev.	Comments	Date

gleeson

Gleeson Homes (Head Office)
Unit 5, Europa Court | Sheffield Business Park | Sheffield |
South Yorkshire | S9 1XE

01142 612900

www.gleesonhomes.co.uk

Project:
358/9 House Type
Render

Title:
Elevations

Scale:	Date:	Drawn:	Checked:
1:100 @ A3	01.11.21	JJ	DR

Drawing No:	Revision:
21-358-M-0301	C02