


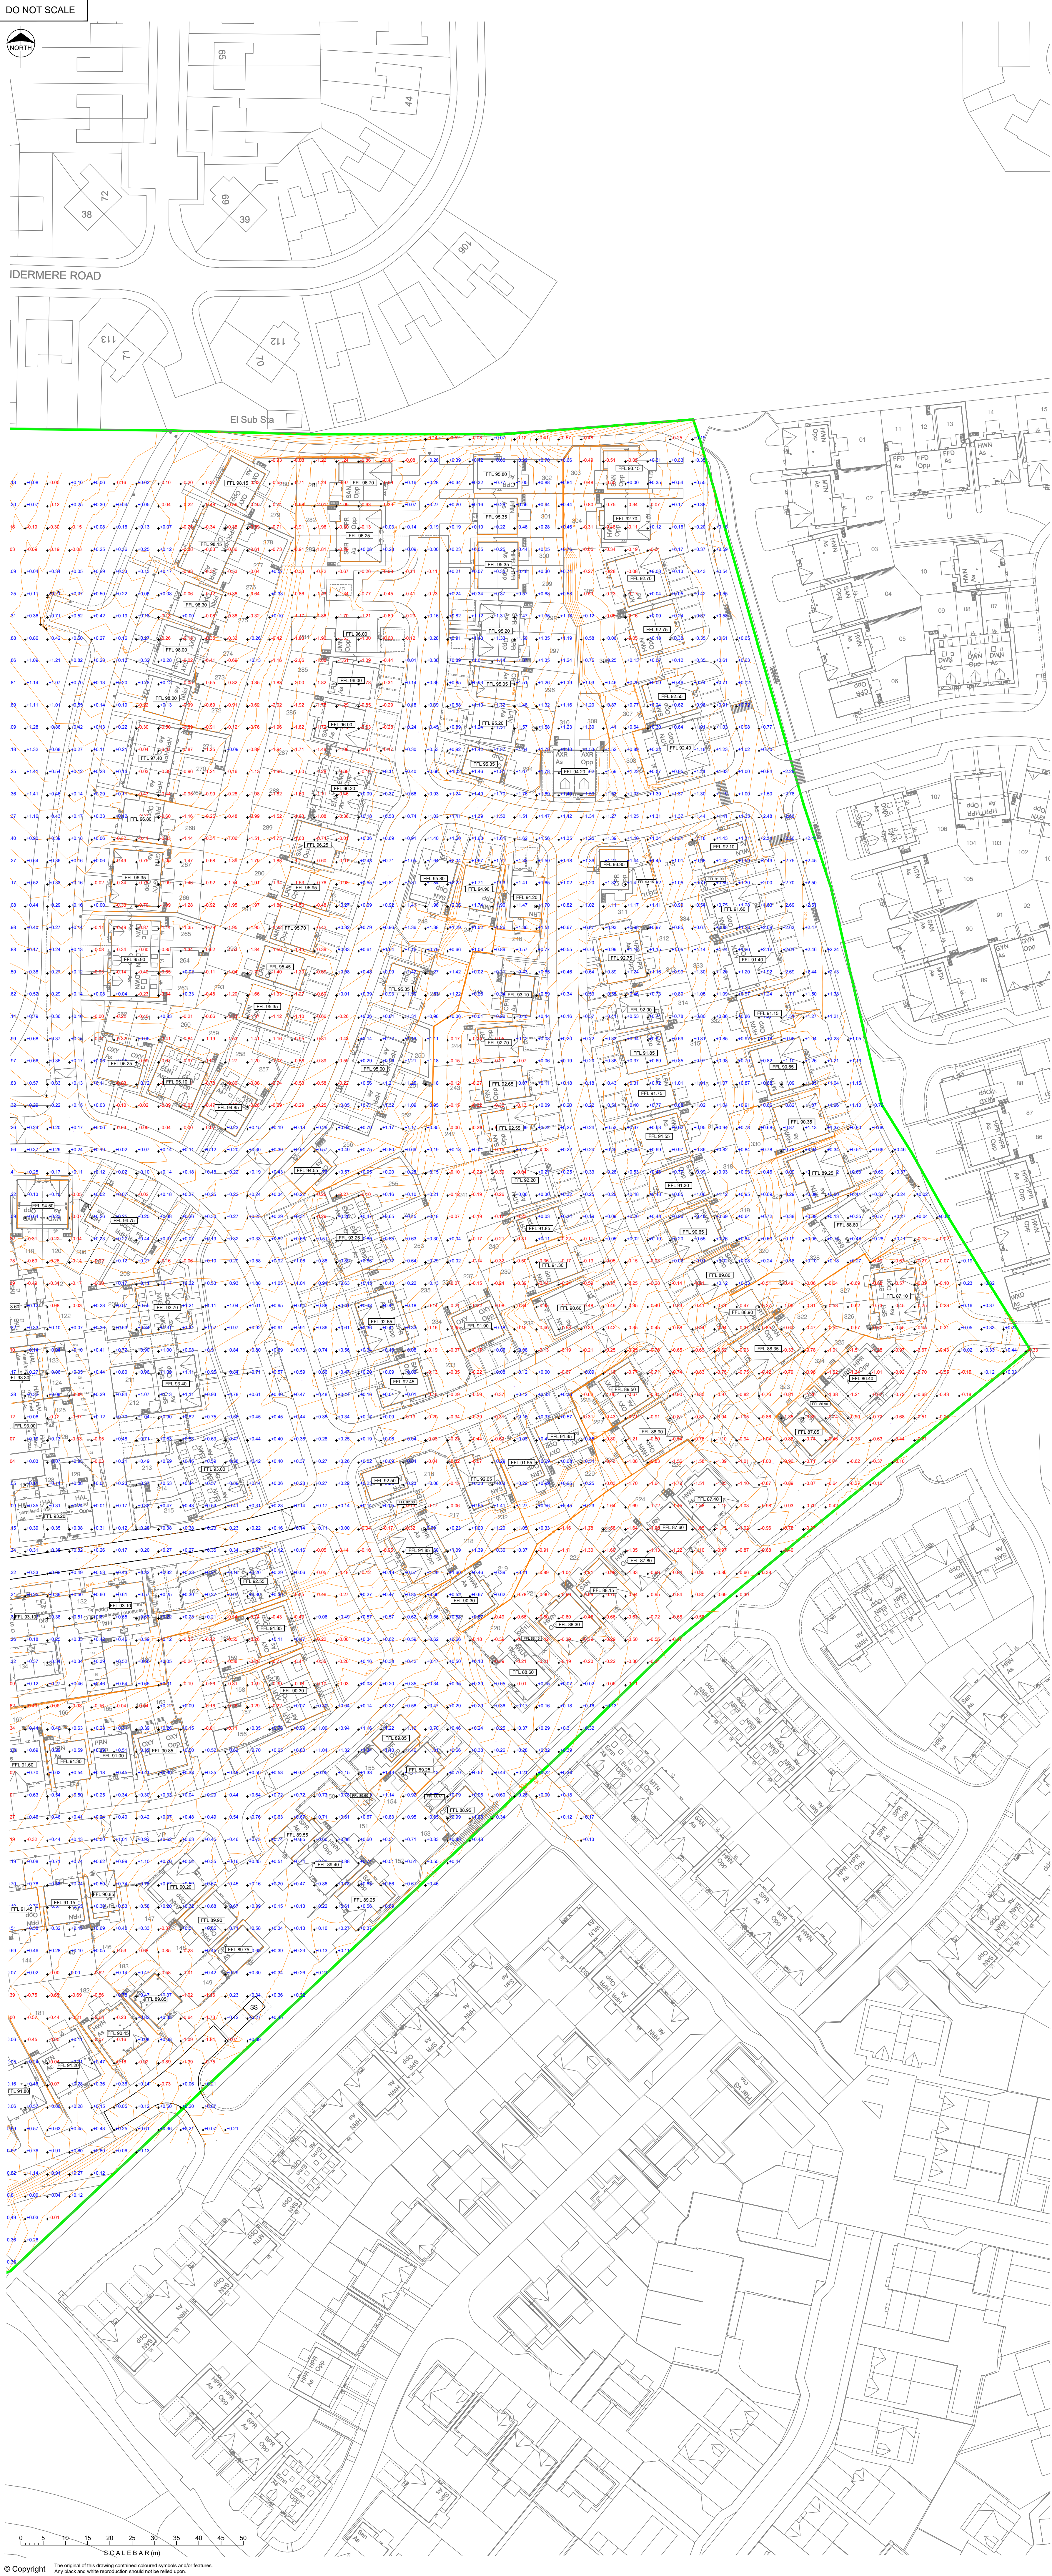

Legend

- 0.5 Cut Depth
- +0.5 Fill Depth
- FFL 80.00 Proposed finished floor level

Note

Contours shown are proposed finished levels at 200mm intervals.

Proposed Volumes to formation

Taken between post site scrape surface (ext'g -275mm) and proposed site formation levels (-400 average)

Cut	20,500 m³
Fill	62,700 m³
Net	-42,200 m³

This shortfall does not take into account arising (see below)

Arising Calculations:

Surface water sewers/manholes	= 7,350 cu.m.
Foul water Sewers/manholes	= 2,670 cu.m.
Private drainage / Services (Assumed 10cu.m per plot)	= 3,980 cu.m.
Foundations (Estimate) (Assumed 30cu.m per plot)	= 11,170 cu.m.
Total	= 25,170 cu.m. (estimate)

Overall Cut/Fill Net Value

Net	- 17,030m³
-----	------------

SHORTFALL (Client to advise)

Note:
Tendering contractors to make own assessment of quantities.

Anhydrite Bund Volumes

ANHYDRITE	19,890m³
TOP SOIL @ 150mm	1,480m³
SPOIL @ 300mm	2,690m³
MOUNDS	1,710m³

Cut	0 m³
Fill	25,770 m³
Net	25,770 m³

Volumes calculated separately - Above volumes not included within overall cut/fill net value

PLANNING

C	03.02.26	Phase 6 Layout revised	JAR	JAR
B	23.01.06	Phase 6 layout revised	JAR	JAR
A	23.10.25	Phase 5 levels reduced	JAR	JAR
Rev.	Date	Revision	By	Appd.

coopers
chartered consulting engineers

Tel: 01244 684910
Email: admin@coopers.co.uk
Web: http://coopers.co.uk

Park House
Sandpiper Court
Chester Business Park
Chester
CH4 9QU

Client

Story
HOMES

Project

EDGEHILL PARK, CUMBRIA,
PHASE 3

Title

Earthworks Cut and Fill
Sheet 2 of 2

DRAWING NUMBER	SCALE at A0	1:500
7503-P6 / PL03-2	DATE	15.05.25
	DRAWN	PW
	CHECKED	AJ
	REVISION	C