

LAND ADJACENT TO SOUTHRIGG, NETHERTOWN ROAD

Plots 4 & 5 Private Road and Services

CONSTRUCTION TRAFFIC MANAGEMENT PLAN



Introduction

This Construction traffic management plan details the steps to satisfy the conditions set in planning application 4/21/2368/001 Condition 6 & 7 listed below. It is to be noted that this application is linked to the approved application 4/21/2369/OR1 and reference images from this application have been used in this document.

6.Details of all measures to be taken by the applicant/developer to prevent surface water discharging onto or off the highway must be submitted to the Local Planning Authority for approval prior to development being commenced. Any approved works must be implemented prior to the development being completed and must be maintained operational thereafter.


7.Development must not commence until a Construction Traffic Management Plan has been submitted to and approved in writing by the Local Planning authority. The CTMP must include details of:

- Retained areas for vehicle parking, manoeuvring, loading and unloading for their specific purpose during the development;*
- Cleaning of site entrances and the adjacent public highway;*
- Details of proposed wheel washing facilities;*
- The sheeting of all HGVs taking spoil to/from the site to prevent spillage or deposit of any materials on the highway;*
- pre-construction road condition established by a detailed survey for accommodation works within the highways boundary conducted with a Highway*

This construction management plan details the control measures for

- Details of all measures to be taken by the applicant/developer to prevent surface water discharging onto or off the highway
 - Condition detailed on Page 3 (image1) and Page for (Build Sequence Step 1)
- Retained areas for vehicle parking, manoeuvring, loading and unloading for their specific purpose during the development;
 - Condition detailed on Page 3 (image 1)
- Cleaning of site entrances and the adjacent public highway;
 - Condition detailed on Page 5 (Care of existing highway)
- Details of proposed wheel washing facilities;
 - Condition detailed on Page 3 (image 1) and Page 5 (Care of existing highway)
- The sheeting of all HGVs taking spoil to/from the site to prevent spillage or deposit of any materials on the highway;
 - Condition detailed on Page 5 (Care of existing highway)
- Pre-construction Road condition established by a detailed survey for accommodation works within the highway's boundary conducted with a Highway Authority representative; with all post repairs carried out to the satisfaction of the Local Highway Authority at the applicants expense;
 - Condition detailed in Reference Document; LAND ADJACENT TO SOUTHRIGG, NETHERTOWN ROAD PRE-CONSTRUCTION SURVEY (used as part of application 4/21/2369/OR1)

PLOT 4 & 5 DEEP GHYLL WOOD, NETHERTOWN ROAD, ST BEES, CUMBRIA, CA27 0AY
CONSTRUCTION TRAFFIC MANAGEMENT PLAN

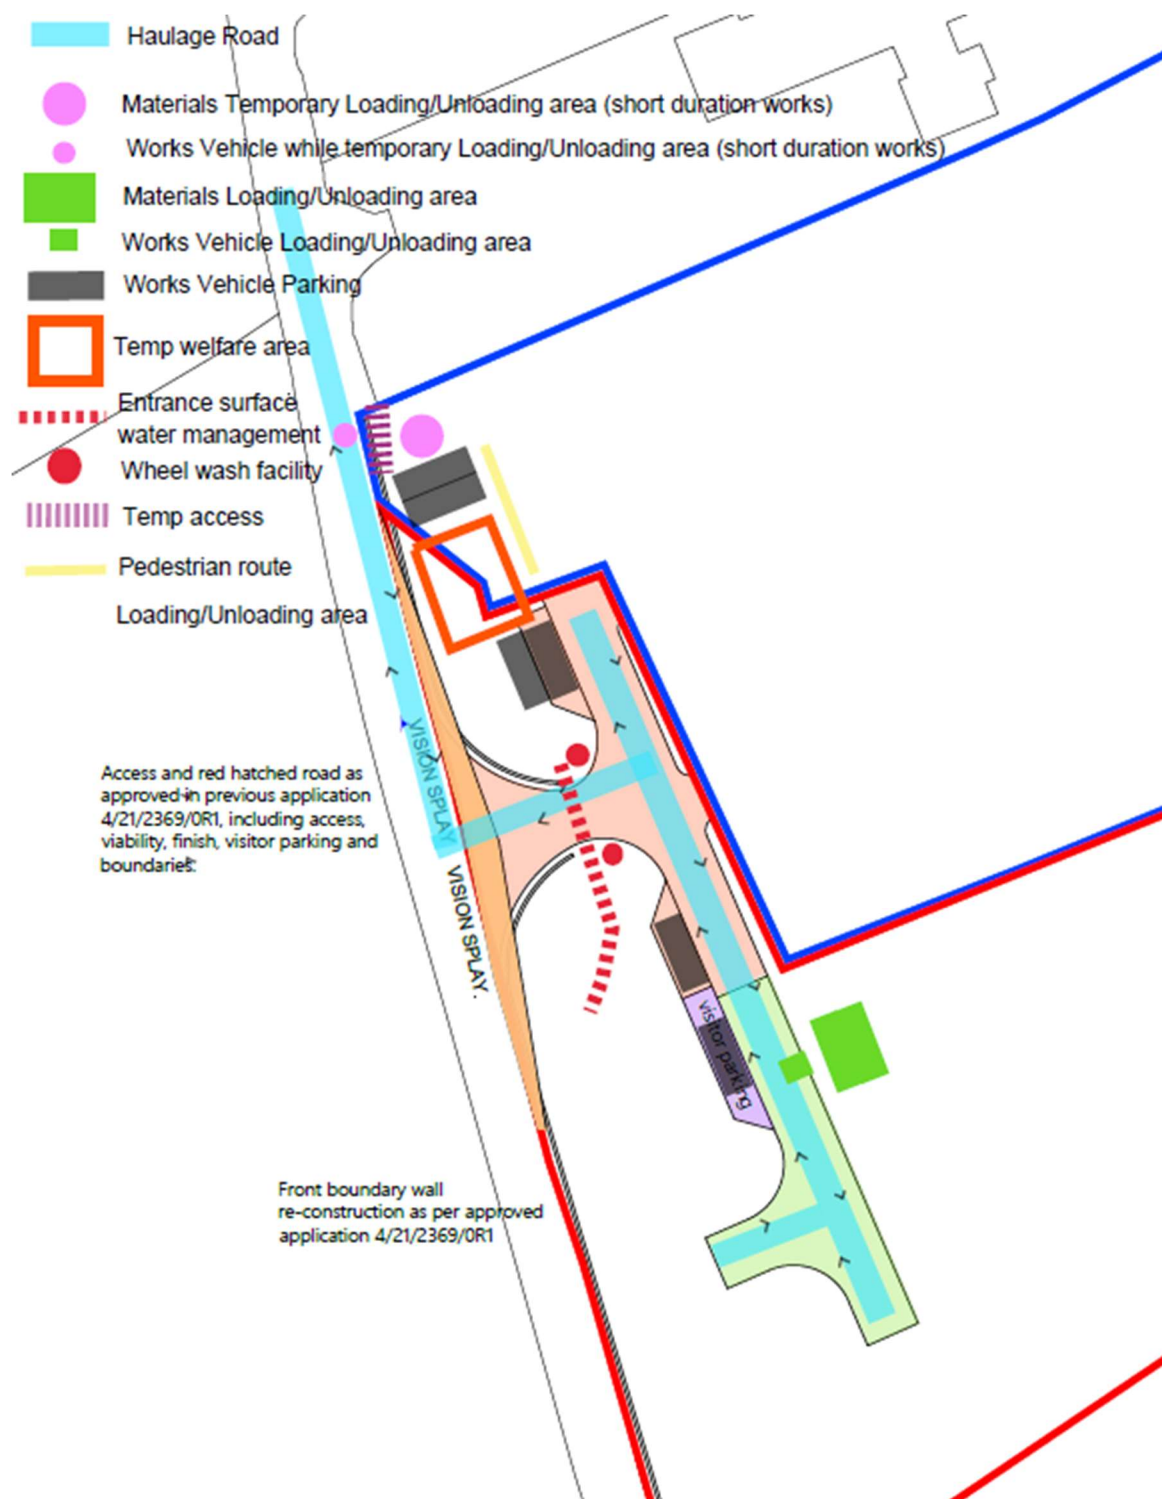

(Image 1)


Access to the site

Access to the site will be via the new private road highlighted in yellow (Page 4 Image 3). Temporary access is available to the NW of the site via a gated opening highlighted in purple (Page 3 Image 1), this will be available until the completion of the private road and services installation. Access and egress from this temporary point shall be kept to a minimum. Construction vehicle routing highlighted in blue and parking highlighted in black is shown on (Page 3 Image 1).

Build Sequence

The proposed build sequence for the site is to

1. Installation of the private road to enable construction vehicles to load, unload and turnaround on the site minimising the amount of disruption to the Nethertown road. Surface water management at the site entrance will be controlled by the Arco drain as per the approved drainage strategy protecting the highway from water and liquid egress. See insert below (Page 4 Image2). The new private access road will allow crossing of the highway verge. A contingency site entrance surface water management route with silt trap and sump has been Highlighted in red on (page 3 image 1). This will be installed if the private road isn't complete at the beginning of any works.
2. Installation of services, UU waste water, UU Fresh water and ENW power supplies. Waste water is to be installed as per drainage strategy. A report has been generated to confirm connection of the proposed manhole to the UU sewer as per the drainage strategy.
3. Each plot is to be built on an individual basis after the installation of the road and services. Each plot owner has a responsibility to comply with the steps detailed in this plan. Any deviation must be agreed with the Copeland local highway authority prior to any change being made.

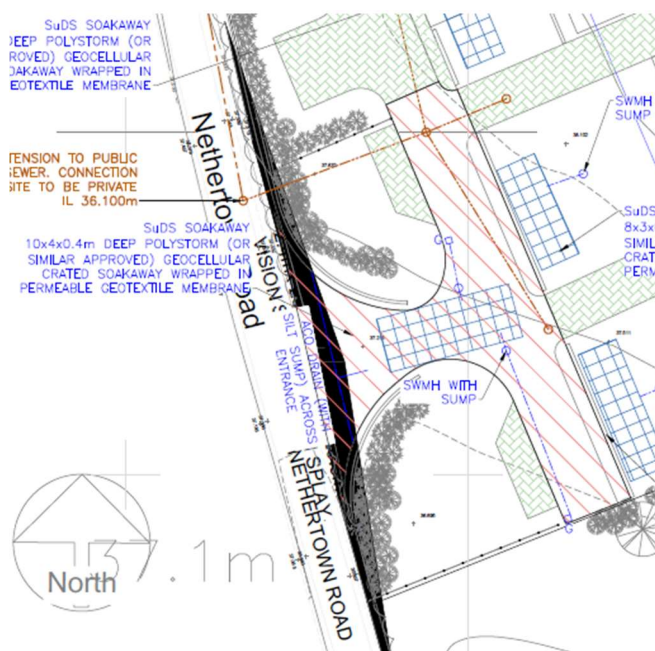

(Image 2) (Extract from application 4/21/2369/0R1)



(Image 3) (Extract from application 4/21/2369/0R1)

Care of existing Highway

The private road is to be installed and used as single point of access for loading, unloading, and manoeuvring. Once installed this will mitigate migration of soil onto the highway. Further to this, a wheel washing facility will be provided at the site entrance. HGV's entering and exiting the site are to be sheeted to prevent spillage onto the highway. Machinery is to be loaded on site and transported off using the private road. Provisions will be made for cleaning of the highway in the event of material from the site being spilled.

Welfare, Works Vehicle Parking and Loading Areas/Unloading areas

Welfare, parking and loading/unloading areas are to be located in an area that does not impair the visibility splay as detailed below (Page 3 Image 1). A temporary area will be used for short duration works when necessary to load/unload materials onto site from the Nethertown road for construction of the private road. The private road once constructed is to be utilised as the method for loading, unloading, and manoeuvring to minimise disruption on the Nethertown road.