





FRONT ELEVATION



SIDE ELEVATION

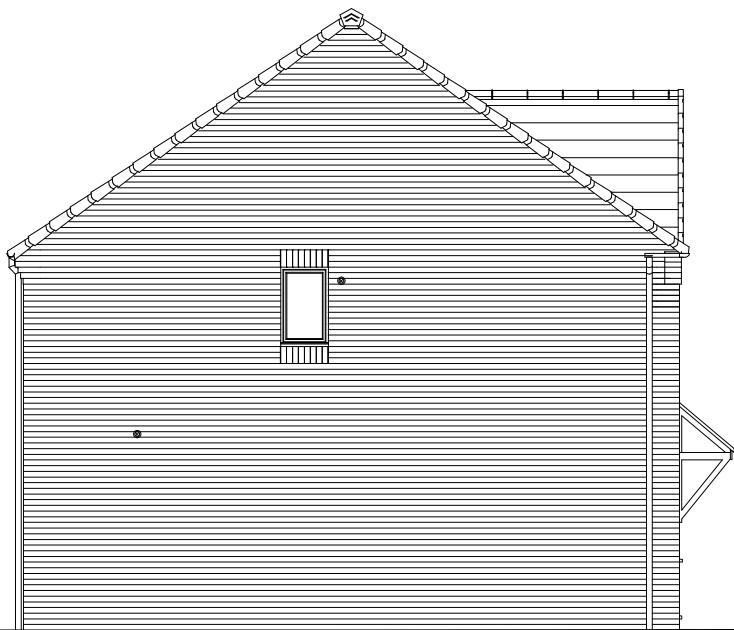

REAR ELEVATION

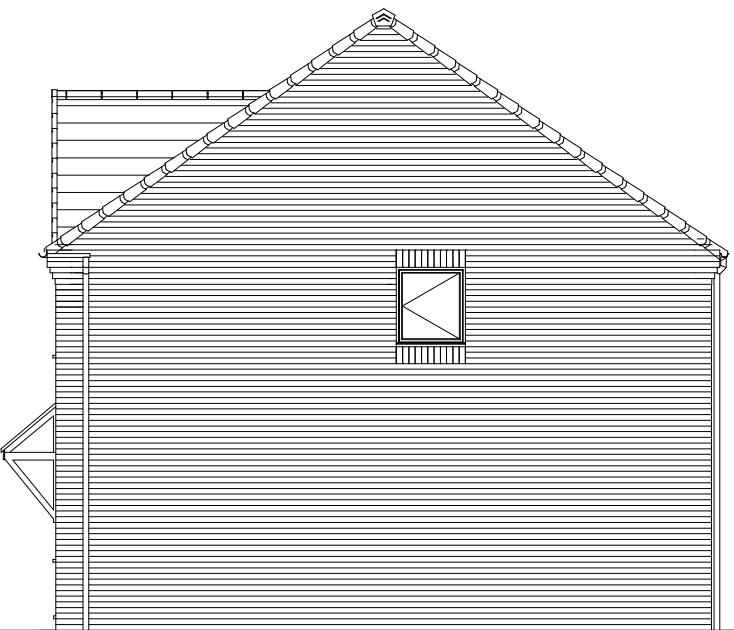

SIDE ELEVATION

- FEATURES
- * Flat profile roof tiles.
 - * Dry verge detail.
 - * UPVC fascia at eaves, with brick corbel to gable in same brick as main elevation
 - * Brick soldier course heads.
 - * Plain side hung casement windows.
 - * Brick soldier course cills.
 - * Six panel main entrance door, with lean to canopy over on "gallows brackets"
 - * Twelve panel garage door
 - * Dark brick below DPC.

CONCRETE BRICKS

- Where concrete bricks are used in lieu of standard clay bricks, bed joint reinforcement must be installed in the outer leaf, two courses above and below any opening, extending 600mm beyond either side of the opening.
- Refer to GF working plan for details of any additional movement joints required.
- Working examples from the S.E. are available from Group Technical if more detail is required (Document Ref: STRUCT-010)

C08	Personnel door position corrected	17.01.23
C07	Extract vents shown in correct positions	25.10.22
C06	Concrete brick notes added	18.07.22
C05	Extract vents added	15.07.22
C04	Garage door style updated	20.06.22
C03	Front door style amended	10.01.22
C02	Canopy style corrected	08.06.21
C01	Issued for construction	21.05.21
P01	Initial issue	08.04.21
Rev.	Comments	Date

gleeson

Gleeson Homes (Head Office)
Unit 5, Europa Court | Sheffield Business Park | Sheffield |
South Yorkshire | S9 1XE

01142 612900

www.gleesonhomes.co.uk

Project:
435 House Type
Urban

Title:
Elevations

Scale:	1:100 @ A3	Date:	08.04.21	Drawn:	JJ	Checked:	DR
--------	------------	-------	----------	--------	----	----------	----

Drawing No:	21-435-U-0301	Revision:	C08
-------------	---------------	-----------	-----